


AquaFit Plus 19' Dual Temp Specifications

General		
Shape	Oval	
Seating Capacity	N/A	
Shell Material	DuraTex™	
Dimensions	90¼" x 228" x 52" H/ (229cm X 579cm x 132cm H)	
Corner Radii	N/A	
Water Capacity	1730 Gallons (6550 Liters) Swim 1450 Gallons (5490 Liters) Spa 280 Gallons (1060 Liters)	
Dry Weight	3500 lbs (1590 kg)	
Full Weight	18000 lbs (8200kg)	
Skirt Material	Terracina or Wood	
Water System		
Water Treatment System	UltraPure swim & spa sides	
Filters/Coverage	2 / 75 sq. ft & 1/135 sq. ft.	
Gate Valves	2 per pump + 2 per lower control	
Total Hydrotherapy Jets	17	
Jet - Air Adjustable/Directional	0	
Jet - Rotator	0	
Jet - Dual Rotator	0	
Jet - Multi Port Spinner	0	
Jet - Mini Rotator	8	
Jet - Mini Directional	8	
Jet - Euro Rotator	0	
Jet - Mini Directional in Pillow	0	
Typhoon Jet	1	
Swim Jets	4 Standard (6 Optional)	
Ozone Jet	1 Swim, 1 Spa	
Heater Return Jet	1 Swim, 1 Spa	
Pump Returns	4 Standard or 5 Optional Swim / 2 Spa	
Diverter Valves	1 on Spa Side	
Floor Drains	1 Swim, 1 Spa	
Skimmer	3 - 8" Weir	
Special Features		
Jet Therapy Pillows	0	
Headrest Pillows	0	
Optimounts™	10	
Tether Mount	2	
Swim Bar	1	
Swim Jet Air Valves	2	
Swim Tether	1	
Stereo	Optional	
Pump Information		
	Domestic (60Hz)	Export (50Hz)
Swim Motor Size - Peak (Continuous) HP	5.0 (3.0) HP	3.6 (2.0) HP
Swim Jet Pumps # of Pumps/Speed	1/Dual & 1/Single Standard or 1/Dual & 2/Single Option	1/Dual & 1/Single or 1/Dual & 2/Single Option
Spa Motor Size - Peak (Continuous) HP	5.0 (2.0) HP	3.6 (2.0) HP
Spa Jet Pumps # of Pumps/Speed	One/ Single	One/ Single
Circulation Pump	1 Spa Side & 1 Swim Side with UltraPure	1 Spa Side & 1 Swim Side with UltraPure
Electrical System		
	Domestic (60Hz)	Export (50Hz)
Voltage	240	230
Amperage - Swim	50 / 40	3x16 / 2x16 / 1x32
Amperage - Spa	50 / 40	3x16 / 2x16 / 1x32
Heater	5.5 kW	5.2 kW
Thermostat	Electronic	Electronic
Light	23 Points of LED Light	23 Points of LED Light
Control Sytem - Swim	Gecko	Gecko
Upper Control - Swim	M-Drive	M-Drive
Control Sytem - Spa	Gecko	Gecko
Upper Control - Spa	M-Drive	M-Drive




Note: 1. Subject to change without notice.
2. Builder Pack model not available.

Architectural Specification

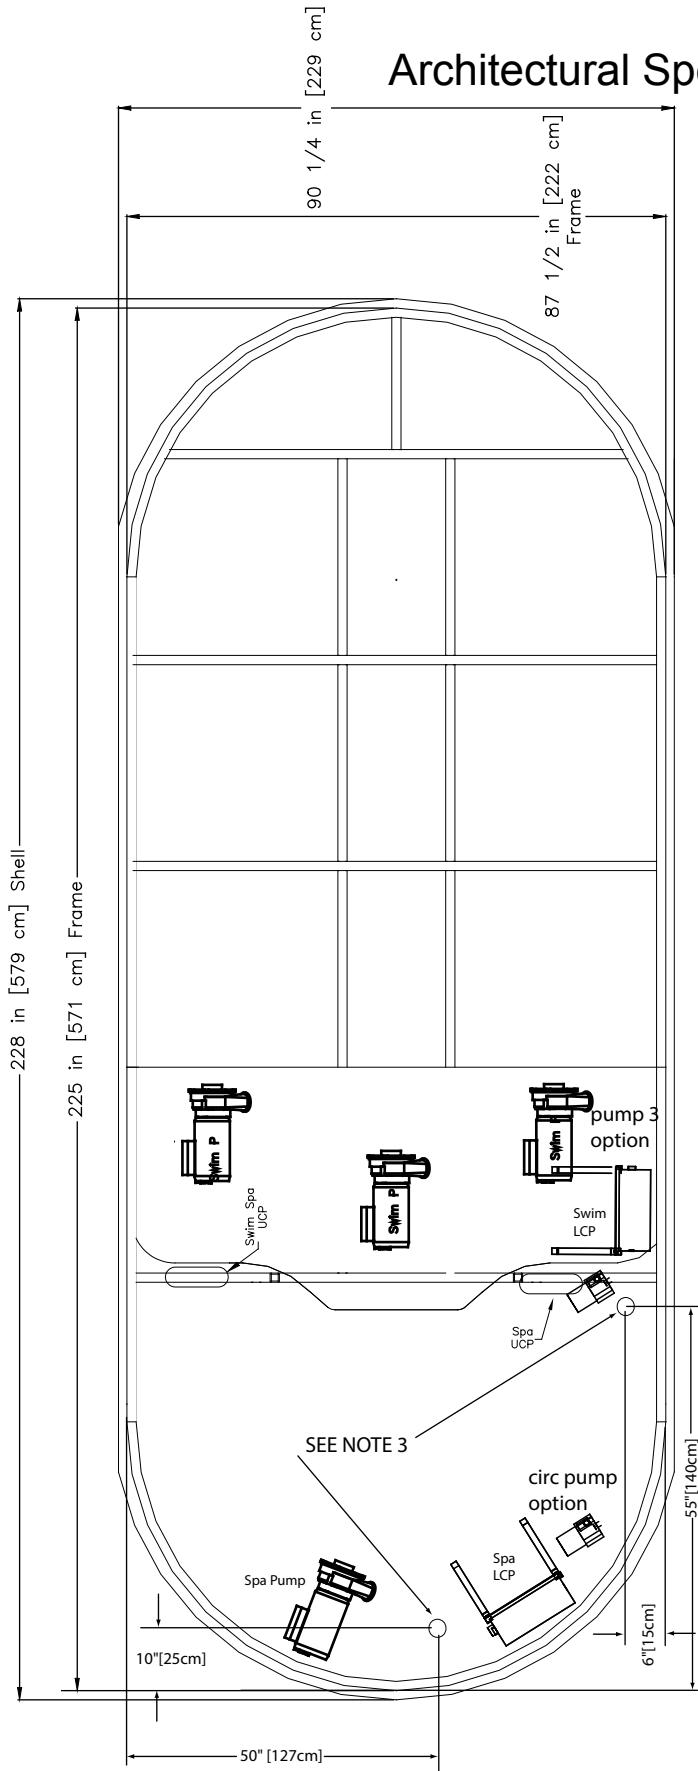

TOP VIEW
AFS MUST BE FULLY SUPPORTED OVER THE ENTIRE BASE.
REFER TO D1 DOC-138 FOR INSTALLATION DETAILS.

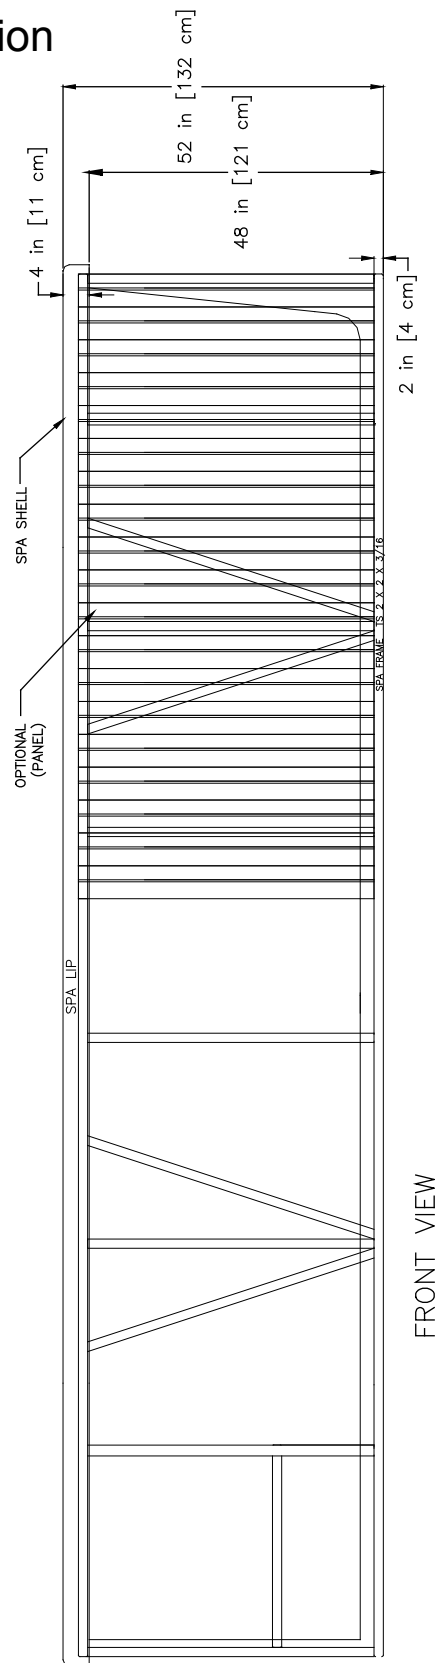


FRONT VIEW

1. Engineering specs may differ slightly from brochure.
2. Optional cabinets may add significant weight. Ask your dealer for exact details.
3. This is the approximate location to bring power through the bottom of the spa.

Caution:

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.

Plumbing Configuration

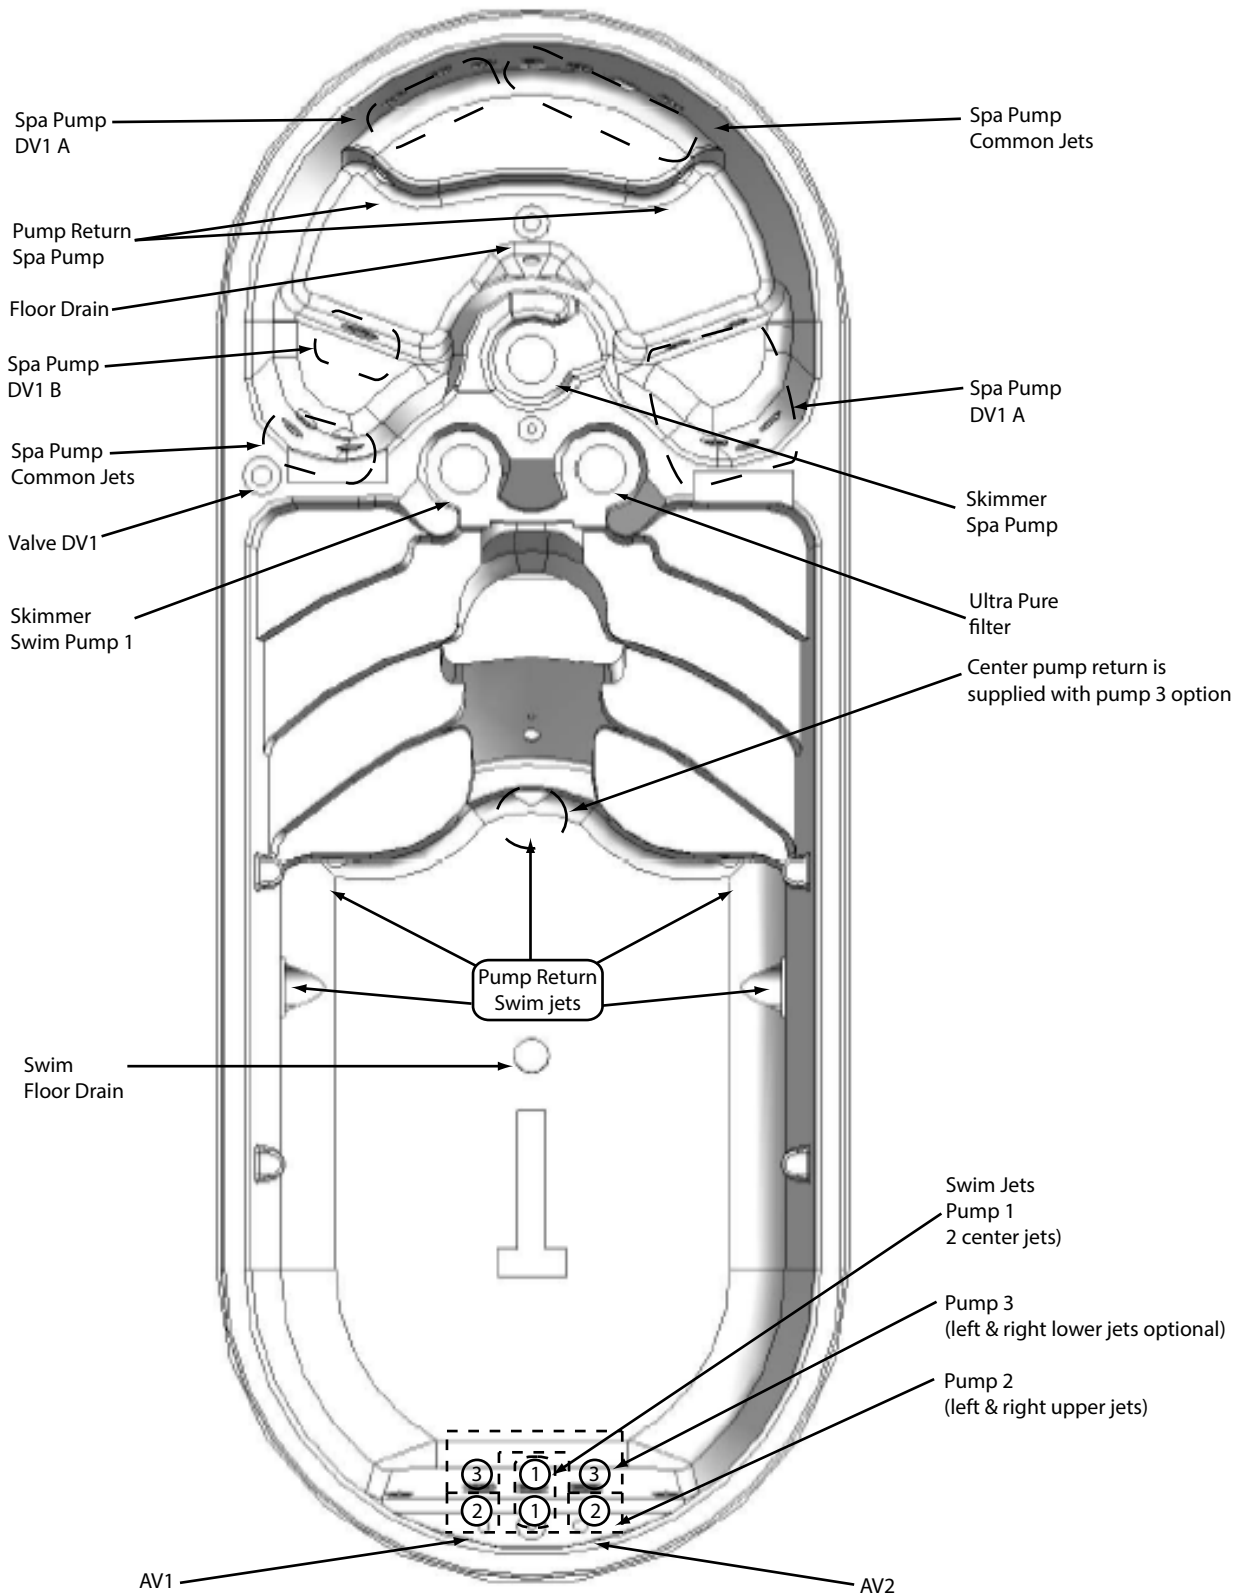

Spa side:

DV1 A = Diverter Valve 1 (A position Clockwise)

DV1 B = Diverter Valve 1 (B position counter Clockwise)

Swim side:

AV1 = Air Valve 1, control top swim jets (Clockwise minimum flow, Counter Clockwise maximum flow).

AV2 = Air Valve 2, control bottom swim jets (Clockwise minimum flow, Counter Clockwise maximum flow).

All Drains in common loop with pump 1, 2 and 3.

Jet Insert Designations

